


Model SL is a low-lead wye strainer with dual 0.25" plugged accessory ports and FNPT end connections. The 20 mesh stainless steel strainer is removable for cleaning and inspection.



SPECIFICATIONS	
Pressure Ratings:	400 PSI (2758 kPa)
Temperature Ratings:	250°F (120°C)
Body Material:	Naval Brass, C46500 Low-Lead (Maximum lead content of .25 % by weight)
End Connections:	FNPT, Inlet and Outlet <i>Optional Press End connection.</i>
Seals:	EPDM
Strainer:	20 Mesh Stainless Steel
Available Options:	"PL" Low-Lead Pressure/Temperature Port, "MAV" Manual Air Vent, "DV" Hose End Drain Valve and "PTE" Port Extensions

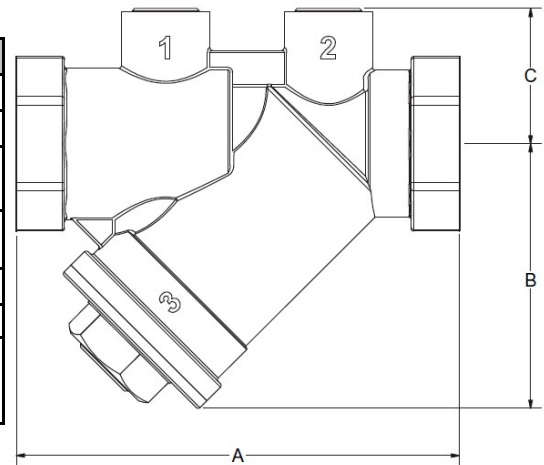

LOW LEAD
STRAINERS

NOMINAL DIMENSIONS & WEIGHTS								
MODEL	SIZE			A	B	C	WEIGHT	
	in	mm					lbs	kg
SL-050	0.50”	15	in	3.70	2.15	1.11	1.03	0.47
			mm	94.10	54.60	28.20		
SL-075	0.75”	20	in	3.84	2.15	1.11	1.05	0.48
			mm	97.50	54.60	28.20		
SL-100	1.00”	25	in	4.23	2.15	1.11	1.20	0.54
			mm	107.40	54.60	28.20		
SL-125	1.25”	32	in	5.31	3.00	1.36	2.70	1.22
			mm	135.00	76.35	34.60		
* <i>Dimensions not for construction purposes unless certified by factory.</i>								
Please reference data sheet #Bulletin-MB-Accessories for optional accessories.								

This page left blank intentionally.