


# Valve Package (Model # 2RD-AB-FLEX)


Typical For:

Job Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Engineer: \_\_\_\_\_  
Contractor: \_\_\_\_\_

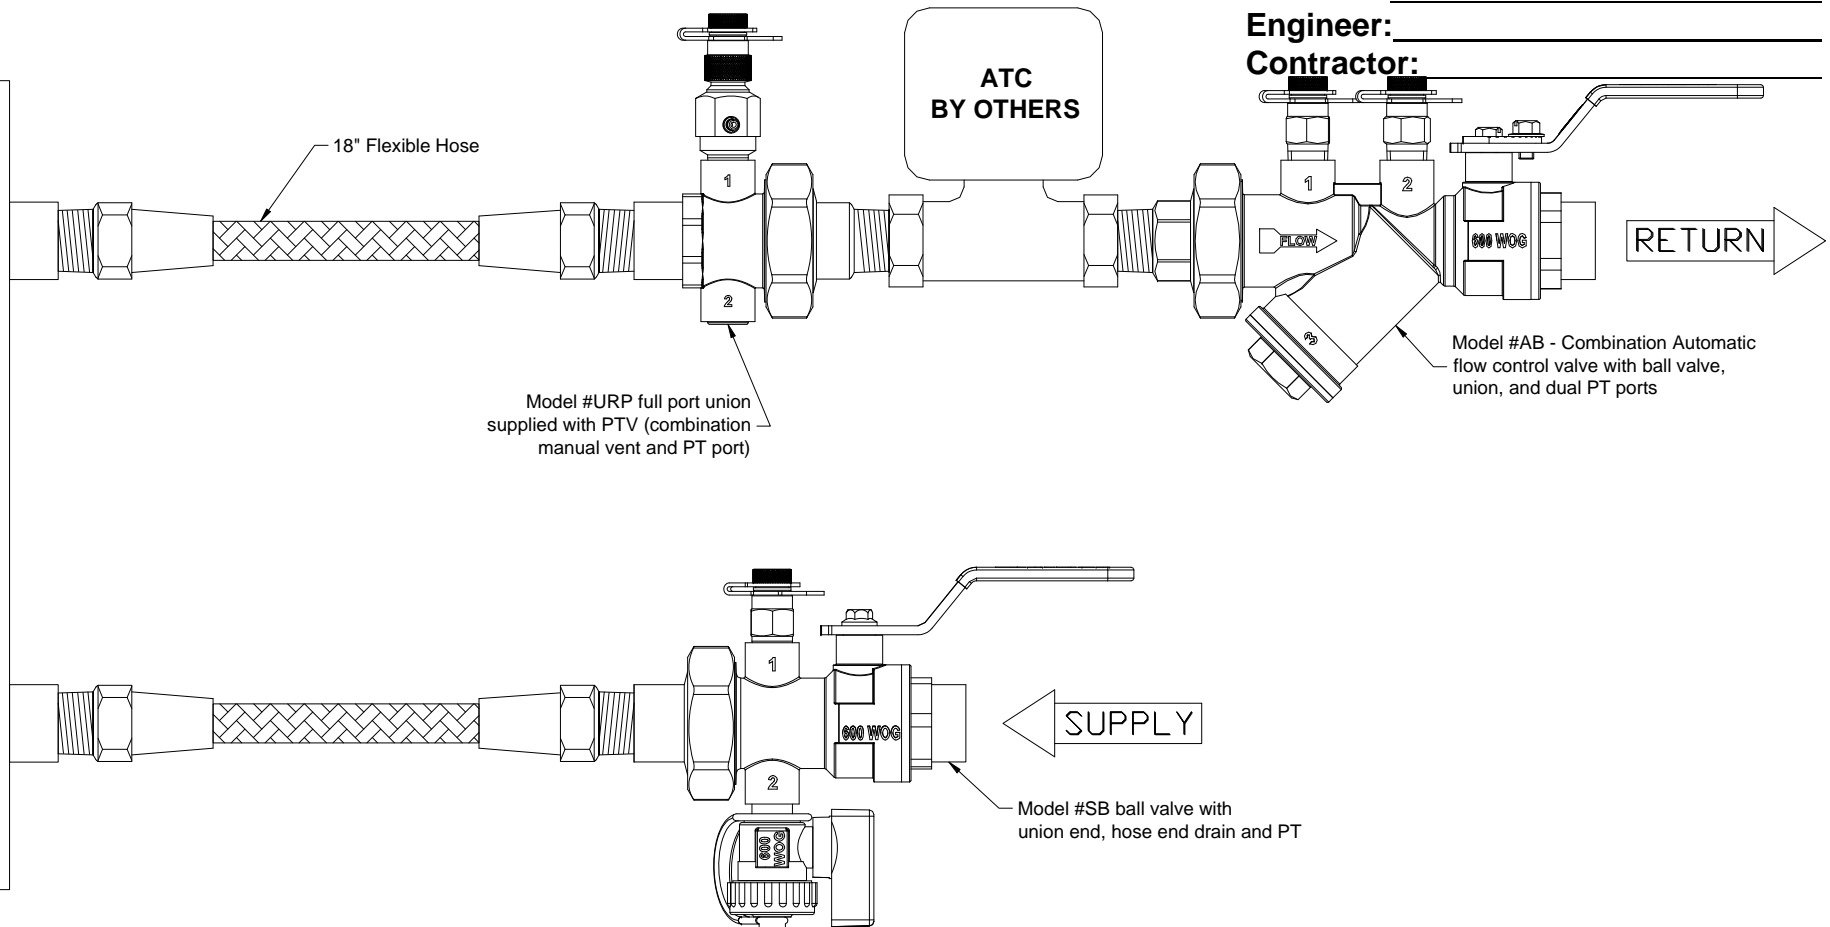

**Submitted By:**  
**Tunstall Corporation**  
**118 Exchange Street**  
**Chicopee, MA 01013**  
**Phone: 413-594-8695**  
**Fax: 413-598-8109**

Model AB Automatic Balancing Valve is a combination ball valve, automatic flow control device and union. The removable flow cartridge is factory set to automatically limit the GPM to within +5% of the specified flow. The ball valve has a chrome plated ball, Teflon seats and a blowout proof stem with double EPDM O-ring seals. The union has an EPDM O-ring seal and tailpiece available in MNPT, FNPT, and SWT end connections. Standard features include Memory Stop and Dual Pressure / Temperature Ports.

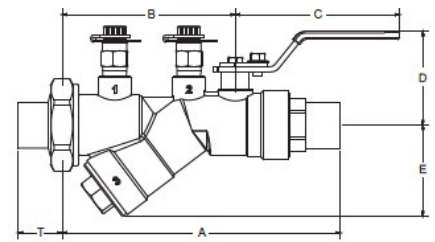

AUTOMATIC

SPECIFICATIONS	
Pressure Ratings:	600 PSI (4140 kPa)
Temperature Ratings:	250°F (121°C)
Accuracy:	± 5% of flow rate
Body Material:	Forged Brass
End Connections:	Brass - Fixed End: SWT, FNPT & Press-End Union End: SWT, FNPT, MNPT & Press-End
Flow Cartridge: 1/2" to 1-1/2" 2"	Ultrason® Composite Stainless Steel
Seals:	EPDM
Ball:	Chrome Plated Brass, full port, 100% positive shut off. <i>Optional 316 Stainless Steel.</i>
Stem:	Brass. <i>Optional 316 Stainless Steel.</i>
Handle:	Full size Zinc Plated lever w/Vinyl Grip
Available Options:	"PTV" combination PT & Air Vent, DV hose end Drain Valve & Extensions.

NOMINAL DIMENSIONS & WEIGHTS													
MODEL	SIZE			A		B	C	D	E	*T SWT	Flow Range	WEIGHT	
	in	mm		FNPT	SWT							lbs	kg
AB1e-050	0.50"	15	in	5.28	5.64	3.59	1.97	1.61	1.91	0.83	0.35 to 5.0 GPM	1.78	0.81
			mm	134.10	143.30	91.20	50.10	40.90	48.50	21.08			
AB1e-075	0.75"	20	in	5.41	5.92	3.59	1.97	1.61	1.91	0.98		1.83	0.83
			mm	137.40	150.40	91.20	50.10	40.90	48.50	24.89			
AB1e-100	1.00"	25	in	5.75	6.21	3.59	1.97	1.61	1.91	0.92		1.97	0.89
			mm	146.10	157.70	91.20	50.10	40.90	48.50	23.37			
AB2e-050	0.50"	15	in	5.71	5.95	3.86	3.66	2.08	2.02	0.83	0.35 to 10.0 GPM	2.09	0.95
			mm	145.16	151.16	98.04	92.99	52.83	51.33	21.08			
AB2e-075	0.75"	20	in	5.74	6.20	3.86	3.66	2.08	2.02	0.88		2.09	0.95
			mm	146.02	157.48	98.04	92.99	52.83	51.33	22.35			
AB2e-100	1.00"	25	in	5.96	6.36	3.86	3.66	2.08	2.02	0.92		5.05	2.29
			mm	151.51	161.54	98.04	92.99	52.83	51.33	23.37			
AB2e-125	1.25"	32	in	6.14	6.69	3.86	3.66	2.08	2.02	1.43	5.05	2.29	
			mm	155.96	169.93	98.04	92.99	52.83	51.33	36.32			
AB3-100	1.00"	25	in	6.98	7.18	5.38	5.03	2.44	3.61	1.41	5.0 to 21.0 GPM	5.05	2.29
			mm	177.29	182.37	136.65	127.76	61.98	91.69	35.81			
AB3-125	1.25"	32	in	7.06	7.24	5.38	5.03	2.44	3.61	1.43		5.17	2.35
			mm	179.32	183.90	136.65	127.76	61.98	91.69	36.32			
AB3-150	1.50"	40	in	7.06	7.37	5.38	5.03	2.44	3.61	1.17		5.17	2.35
			mm	179.32	187.20	136.65	127.76	61.98	91.69	29.72			
AB4-150	1.50"	40	in	9.59	9.91	7.44	5.66	2.83	3.91	1.17	11.0 to 70.0 GPM	8.63	3.91
			mm	249.60	251.70	189.00	143.60	71.90	99.50	29.72			
AB4-200	2.00"	50	in	9.59	10.35	7.44	5.66	2.83	3.92	1.50		8.65	3.92
			mm	249.60	262.89	189.00	143.60	71.90	99.57	38.10			

\* Please reference the tailpiece data sheet #Bulletin-MB-TP for other sizes and connections.

**Dimensions not for construction purposes unless certified by factory.**

Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.



[www.maconbalancing.com](http://www.maconbalancing.com)



Tunstall Corporation  
118 Exchange Street · Chicopee, MA 01013  
Phone (413) 594-8695 · Fax (413) 598-8109  
Section: Components Bulletin-MB-AB-0915.02

## Selection Chart - Model AB - 0.50" to 2.00"

### STANDARD COMPONENTS

	<b>PT</b>	Pressure/Temperature test port with brass body, dual durometer EPDM core, threaded brass cap with O-ring seal and neoprene retainer strap. Accepts standard 1/8" (4mm) gauge adapter or thermometer stem. Rated to 500 PSI (3450 kPa) and 275°F (135°C)
	<b>MS</b>	Memory stop with position indicator, zinc coated steel.

Please reference data sheet #Bulletin-MB-Accessories for optional accessories.

AUTOMATIC

### Model AB Automatic Balancing Valve 0.50" - 2.00"

Flow GPM	2-32 PSID				Flow GPM	2-32 PSID	
	AB1e-	AB2e-	AB3-	AB4-		AB3-	AB4-
	050 075 100	050 075 100 125	100 125 150	150 200		100 125 150	150 200
0.35	x	x			16.00	x	x
0.50	x	x			17.00	x	x
0.66	x	x			18.00	x	x
0.75	x	x			19.00	x	x
0.88	x	x			20.00	x	x
1.00	x	x			21.00	x	x
1.10	x	x			22.00		x
1.30	x	x			24.00		x
1.50	x	x			26.00		x
1.75	x	x			28.00		x
2.00	x	x			30.00		x
2.20	x	x			32.00		x
2.50	x	x			34.00		x
2.65	x	x			36.00		x
3.00	x	x			38.00		x
3.50	x	x			40.00		x
4.00	x	x			42.00		x
4.50	x	x			44.00		x
5.00	x	x	x		45.00		x
6.00		x	x		48.00		x
7.00		x	x		50.00		x
8.00		x	x		52.00		x
9.00		x	x		5 - 60 PSID		
10.00		x	x		54.00		x
11.00			x	x	56.00		x
12.00			x	x	58.00		x
13.00			x	x	60.00		x
14.00			x	x	62.00		x
15.00			x	x	64.00		x
16.00*			x	x	66.00		x
* AB3 and AB4 Flow GPM continues at top of last two columns. NOTE: Lower flows can be used w/adaptor in larger sizes.					68.00		x
					70.00		x


Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.

[www.maconbalancing.com](http://www.maconbalancing.com)



Tunstall Corporation  
118 Exchange Street · Chicopee, MA 01013  
Phone (413) 594-8695 · Fax (413) 598-8109  
Section: *Components*      Bulletin-MB-AB-0915.02

Model SB Union End Ball Valve offers positive shut-off, pressure/temperature measurement and drain. The ball valve has a chrome plated ball with Teflon seats, blowout proof stem with double EPDM O-ring seals. The union has an EPDM O-ring seal and tailpiece available in MNPT, FNPT, SWT and Press End connections. Standard features include Pressure/ Temperature Port and Hose End Drain Valve.

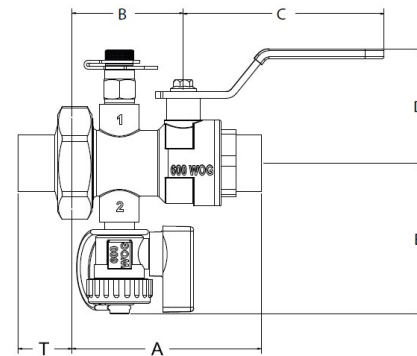



SPECIFICATIONS	
Pressure Ratings:	600 PSI (4140 kPa)
Temperature Ratings:	250°F (121°C)
Body Material:	Forged Brass
End Connections:	Brass - Fixed End: SWT, FNPT & Press End Union End: SWT, FNPT, MNPT & Press End
Seals:	EPDM
Ball:	Chrome Plated Brass, full port, 100% positive shut-off. <i>Optional 316 Stainless Steel.</i>
Stem:	Brass. <i>Optional 316 Stainless Steel.</i>
Handle:	Full size Zinc Plated lever with Vinyl Grip
Available Options:	"PTV" combination PT & Air Vent

NOMINAL DIMENSIONS & WEIGHTS												
MODEL	SIZE			A		B	C	D	E	*T MPT	WEIGHT	
	in	mm		FNPT	SWT						lbs	kg
SB1E-050	0.50"	15	in	3.72	4.08	2.03	3.66	1.61	2.53	1.50	1.51	0.68
			mm	94.5	103.6	51.6	93.0	40.9	64.3	38.1		
SB1E-075	0.75" R	20	in	3.84	4.37	2.03	3.66	1.61	2.53	1.50	1.55	0.70
			mm	97.5	111.0	51.6	93.0	40.9	64.3	38.1		
SB2E-075	0.75"	20	in	3.92	4.49	2.03	3.66	2.08	2.74	1.56	1.58	0.72
			mm	99.6	114.0	51.6	93.0	52.8	69.6	39.7		
SBBE-100	1.00"	25	in	4.13	4.53	2.03	3.66	2.08	2.74	1.75	2.06	0.93
			mm	105.0	115.1	51.6	93.0	52.8	69.6	44.5		
SB3-125	1.25"	32	in	5.42	6.41	2.37	5.03	2.26	3.12	1.80	4.33	1.96
			mm	137.7	162.8	60.3	127.8	57.4	79.3	45.7		
SB3-150	1.50"	40	in	5.42	6.67	2.52	5.65	2.26	3.12	1.80	4.48	2.03
			mm	137.7	169.3	64.0	143.6	57.4	79.3	45.7		
SB4-200	2.00"	50	in	5.03	5.82	2.90	5.66	2.83	3.51	1.98	6.04	2.74
			mm	127.8	148.8	73.7	143.8	71.9	89.2	50.2		

\* Please reference the tailpiece data sheet #Bulletin-MB-TP for other sizes and connections.

**Dimensions not for construction purposes unless certified by factory.**

STANDARD COMPONENTS		
	<b>PT</b>	Pressure/Temperature test port with brass body, dual durometer EPDM core, threaded brass cap with O-ring seal and neoprene retainer strap. Accepts standard 1/8" (4mm) gauge adapter or thermometer stem. Rated to 500 PSI (3450 kPa) and 275°F (135°C)
	<b>DV</b>	Drain valve with forged brass body, chrome plated ball, Teflon seats, double EPDM O-ring stem seals, aluminum handle, 3/4" hose connection with cap and plastic retainer strap. Rated to 600 PSI (4140 kPa) WOG and 250°F (121°C)

Please reference data sheet #Bulletin-MB-Accessories for optional accessories.

Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.

[www.maconbalancing.com](http://www.maconbalancing.com)




Tunstall Corporation  
118 Exchange Street · Chicopee, MA 01013  
Phone (413) 594-8695 · Fax (413) 598-8109  
Section: Components Bulletin-MB-SB-0915.02

SHUT OFF  
VALVES

Model URP Union offers numerous End Connections pressure/temperature measurement and vent. The union has an EPDM O-ring seal and tailpiece available in MNPT, FNPT, SWT and Press End connections.

Standard features include "PTV" Combination PT and Air Vent.




SPECIFICATIONS	
Pressure Ratings:	600 PSI (4140 kPa)
Temperature Ratings:	250°F (121°C)
Body Material:	Forged Brass
End Connections:	Brass - Fixed End: SWT, FNPT & Press End Union End: SWT, FNPT, MNPT & Press End
Seals:	EPDM
Available Options:	"DV" Drain Valve

NOMINAL DIMENSIONS & WEIGHTS											
MODEL	SIZE			A			B	C	*T MNPT	WEIGHT	
	in	mm		FNPT	MNPT	SWT				lbs	kg
URP-038	0.375"	10	in	N/A	N/A	1.88	2.78	0.84	N/A	0.76	0.35
			mm	N/A	N/A	47.68	70.61	21.34	N/A		
URP-050	0.50"	15	in	1.90	2.25	1.88	2.78	0.84	1.50	0.86	0.39
			mm	48.26	57.23	47.75	70.25	21.34	38.10		
URP-075	0.75" R	20	in	1.98	2.19	2.12	2.78	0.84	1.55	0.79	0.36
			mm	50.29	55.65	53.85	70.61	21.34	39.37		
URP-100	1.00"	25	in	2.15	N/A	2.28	3.02	1.08	1.75	1.16	0.53
			mm	54.61	N/A	57.91	76.65	27.43	44.72		
URP-125	1.25"	32	in	2.39	N/A	2.56	3.39	1.46	1.80	2.20	1.00
			mm	60.71	N/A	65.02	86.18	37.08	45.72		
URP-150	1.50"	40	in	2.39	N/A	2.69	3.39	1.46	1.80	2.42	1.10
			mm	60.71	N/A	68.32	86.18	37.08	45.72		
URP-200	2.00"	50	in	2.49	N/A	3.03	3.70	1.76	1.98	3.42	1.55
			mm	63.25	N/A	76.96	94.08	44.70	50.17		

\* Please reference the tailpiece data sheet #Bulletin-MB-TP for other sizes and connections.

**Dimensions not for construction purposes unless certified by factory.**

#### STANDARD COMPONENTS

	<b>PTV</b>	Combination manual air vent and pressure/temperature test port with brass body, dual durometer EPDM core, blowout-proof stem, side discharge vent with 1/8" (4mm) hose barb, threaded brass cap with O-ring seal and neoprene retainer strap. Accepts standard 1/8" (4mm) gauge adapter or thermometer stem. Rated to 250 PSI (1725 kPa) and 250°F (121°C)
---	------------	--

Please reference data sheet #Bulletin-MB-Accessories for optional accessories.

Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.

[www.maconbalancing.com](http://www.maconbalancing.com)



Tunstall Corporation  
118 Exchange Street · Chicopee, MA 01013  
Phone (413) 594-8695 · Fax (413) 598-8109  
Section: Components  
Bulletin-MB-URP-0915.02



These hoses have been specially designed for operating conditions in heating and air conditioning, the elastomer is not sensitive to Glycol or water treatment products.

Each hose is made up of several quality components and the special crimping on the ferrule under strict quality control gives this hose security against any leakage.

The special EPDM core meets a fully defined specification: Shore hardness, resistance to ageing, mechanical resistance (elasticity, tensile fracture, stretching), ability to accept chemical agents in contact with the elastomer and non-toxic. ASTM Fire rated hoses meet 25/50 flammability and smoke development classification requirements of codes and specifications when tested by ASTM E 84 method.

**HOSES ARE DESIGNED FOR HYDRONIC HEATING/COOLING, NOT FOR GAS.**



### SPECIFICATIONS

Temperature Ratings:

All Sizes: 5°F to 230°F  
Less than 41°F with use of Glycol additive

External Braiding:

304 Stainless Steel

Crimping Ferrules:

304 Stainless Steel

Core:

EPDM

End Connections:

Brass - CW614N

• 1/2" - 1" MNPT x Male Cone x Hose Adaptor  
(Gasket Less Connection)

• 1-1/4" - 2" MNPT x BA-U Gasket & Hose Adaptor

Male NPT, Copper SWT

Nickel Plated Brass - CW614N

Brass - CW614N


BA-U Fiber  
Gasket (1-1/4" & 2"):

Adaptor Connections:

Union Nut:

Tailpiece:

Gasket (1-1/4" & 2"):

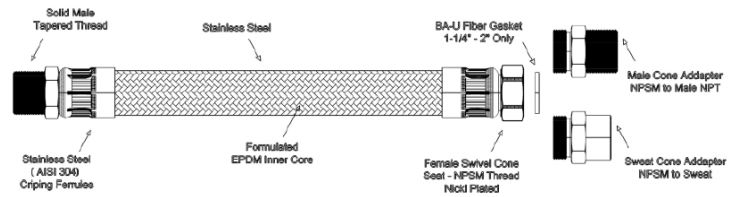

### Specs for Application and Installation

• ON INSTALLATION : Avoid absolutely any tension due to stretching, twisting or torsion during the course of tightening the connectors.

A. Install and tighten the fixed male connector (if applicable)

B. Install and tighten the union adaptor (if applicable)

C. Install and tighten the swivel nut

• Use two spanners in order to screw in the union: One to hold the hexagon of the adaptor. The other to tighten the nut at the same time.

**IMPORTANT** - Do not re-screw the fixed connector or adaptor after tightening of the swivel nut; this will cause torsion on the flexible hose, with a risk of rapid deterioration. On removal, take the same precautions. If the flexible incorporates two fixed connectors, at least one must be installed on a counter-part fitted with a screw connector.

**\*BEFORE INSTALLING REFER TO THE INSTALLATION & OPERATION INSTRUCTIONS FOR COMPLETE DETAILS. WARNING: FAILURE TO FOLLOW THE INSTALLATION & OPERATION INSTRUCTIONS COULD RESULT IN IMPROPER INSTALLATION.**

### NOMINAL DIMENSIONS

SIZE	MODEL #					
	HCA	HCB	HCC	HCD	HCE	HCF
12" LENGTH	1/2"	3/4"	1"	N/A	N/A	N/A
18" LENGTH	1/2"	3/4"	1"	1-1/4"	1-1/2"	N/A
24" LENGTH	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
36" LENGTH	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
<b>Cv *</b>						
SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
12" LENGTH	3.3	11.0	20.9	N/A	N/A	N/A
18" LENGTH	3.2	10.7	20.3	37.9	64.4	N/A
24" LENGTH	3.1	9.9	19.5	36.9	61.0	110.7
36" LENGTH	3.0	9.3	18.2	34.7	55.0	100.8

\* Note the Cv factor is the flow rate, in GPM, through the hose at 1 PSID.

### Max. Operating & Burst Pressure Rating

Size	Operating (PSI)	Burst (PSI)
1/2"	375	1500
3/1"	300	1200
1"	225	900
1-1/4"	200	800
1-1/2"	175	600
2"	150	500

### Typical Specifications:

Furnish and install where indicated on plans **Flexible Connectors** as provided by **Macon Balancing**. Hoses shall be temperature rated: 5°F to 230°F. Pressure rated from 375 PSI to 150 PSI based on hose diameter. Constructed specifically for operating conditions in heating and air conditioning with solid brass connectors, stainless steel ferrules, AISI 304 stainless steel braid, and formulated EPDM inner core design to not be sensitive to Glycol or water treatment products. Hoses shall meet 25/50 flammability and smoke development classification requirements of codes and specifications when tested by ASTM E 84 method.

JOB: \_\_\_\_\_  
REP: \_\_\_\_\_

ENGINEER: \_\_\_\_\_  
CONTRACTOR: \_\_\_\_\_


Optional features and accessories available for this Macon product are an extra charge, and not included in the standard model price.

[www.maconbalancing.com](http://www.maconbalancing.com)



Tunstall Corporation  
118 Exchange Street · Chicopee, MA 01013  
Phone (413) 594-8695 · Fax (413) 598-8109  
Section: Components Bulletin-MB-FH-0915

## Accessories - Model FH

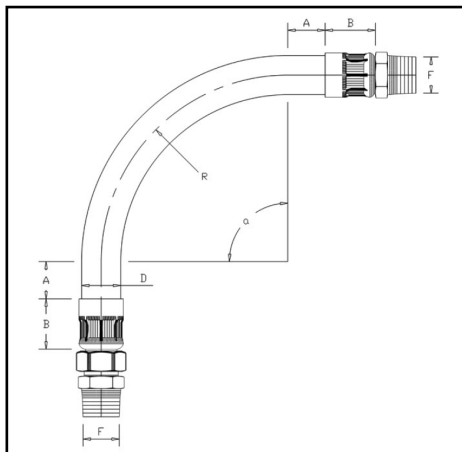

NOMINAL DIMENSIONS						
F	LENGTH	R <sub>min</sub>	A <sub>min</sub>	B	D	CX <sub>max</sub>
	in	mm	mm	mm	mm	
1/2"	12"	60	40	23	17	89°
	18"	60	40	23	17	180°
	24"	60	40	23	17	180°
	36"	60	40	23	17	180°
3/4"	12"	80	55	35	26	32°
	18"	80	55	35	26	126°
	24"	80	55	35	26	180°
	36"	80	55	35	26	180°
1"	12"	110	65	35	35	5°
	18"	110	65	35	35	75°
	24"	110	65	35	35	142°
	36"	110	65	35	35	180°
1-1/4"	18"	120	100	46	42	30°
	24"	120	100	46	42	92°
	36"	120	100	46	42	180°
1-1/2"	18"	200	140	62	53	5°
	24"	200	140	62	53	27°
	36"	200	140	62	53	104°
2"	24"	280	230	57	63	5°
	36"	280	203	57	63	42°

**IMPORTANT:** Do not re-tighten the fixed end or adaptor after tightening the swivel nut. This will cause tension or torsion and can result in rapid deterioration.

**INSPECTION:** We recommend a good maintenance practice and periodic inspections, typically when servicing other components at the unit or at the installation site. Check all hoses for small water leaks, residue, or discoloration on the exterior braid and fittings. If a leak is detected, stop service to the unit and replace hose immediately. Do not attempt to repair the hose.

**Caution:** Introduction of chemicals into the system or unit may cause damage of the inner core of the hose. Consult a water treatment specialist for chemical compatibility before using any chemical additives.

**Warning:** Hoses are designed for Hydronic heating and cooling service only; not for gas.